


Individual Remote Controller

Wired MA remote controller PAR-33MAA



Dimensions 120(W) x 120(H) x 19(D) mm
4-3/4(W) x 4-3/4(H) x 3/4(D) in.

Example of system configuration

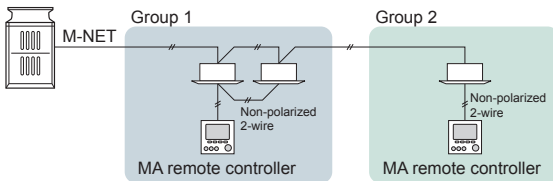

*When a PAR-32MAA is connected to a group, no other MA remote controllers can be connected to the same group.

• Dot LCD

Uses a dot LCD screen on which characters are easy to see and pictorial symbols can be displayed.

• Draft reduction

A "Close" option has been added to the manual vane angle selection. The ventilation duct can be closed to prevent draft air from the air conditioner.

*Not available on all indoor unit models. For details, please contact your local distributor.

• Auto descending panel*

The air flow panels can be raised or lowered with the remote controller. The descending distance of the panels can also be selected.

*Not available on all indoor unit models. For details, please contact your local distributor.

• Night Setback

When the room temperature exceeds the preset upper and lower limits, air conditioning operations are suspended to prevent indoor condensation and extreme temperatures.

• Language selection

The screen's display language can be selected from several languages.

English, French, Spanish, Italian, Portuguese, Greek, Turkish, Swedish

• 3D i-see Sensor

Settings for 3D i-see Sensor can be performed.

Functions

○: Each group ×: Not available

Item	Description	Operations	Display
ON/OFF	Switches between ON and OFF.	○	○
Operation mode switching	Switches between Cool / Dry / Fan / Auto / Heat.	○	○
Room temp. setting	The temperature can be set within the following range. Cool / Drying: 19-35°C [67-95°F] Heat: 4.5-28°C [40-83°F] Auto (single set point): 19-28°C [67-83°F] Auto (dual set points) [Cool] Same as the set temp. range for Cool mode. [Heat] Same as the set temp. range for Heat mode. * Set temperature range varies depending on the model.	○	○
Air flow direction setting	Changes airflow direction. * Available airflow directions vary depending on the model.	○	○
Louver setting	Switches between louver ON/OFF.	○	○
Ventilation equipment control	Interlocked setting and interlocked operation setting with the CITY MULTI LOSSNAY units can be performed. The Stop/Low/High settings of the ventilation equipment can be controlled.	○	○
Error information	When an error occurs, an error code and the unit address appear. Air conditioning unit model, serial number, and contact number can be set to appear when an error occurs. (The information above needs to be entered in advance.) * An error code may not appear depending on the error.	—	○
Timer	ON/OFF timer Turns ON and OFF daily at a set time. • Time can be set in 5-minute increments. • It is also possible to set the ON time only or the OFF time only. Auto-OFF timer Turns off the unit after a certain period of operation. • Operation time can be set to a value from 30 to 240 minutes in 10-minute increments.	○	○
Allows/disallows local operation	The following operation can be prohibited by applying certain settings on the centralized controller: ON/OFF, operation mode setting, temperature setting, fan speed, air direction, and filter sign reset. * While an operation is prohibited, the operation icon lights up (only on the Main display in "Full" mode).	×	○
Operation lock	The following operations can be prohibited: ON/OFF, operation mode setting, temperature setting, and airflow direction setting.	○	○
Temperature range restriction	The room temperature range for each operation mode can be restricted.	○	○
Auto return	The units operate at the preset temperature after a designated period. (Time can be set to a value from 30 to 120 minutes in 10-minute increments.) * Not valid when the temperature setting range is restricted.	○	×
Daylight saving time	The start/end time for daylight saving time can be set. The daylight saving time function will be activated based on the setting contents.	○	○